

Control Boxes & Rigid Lances

Fully Automated Controls plus Increased Safety




The **Control Box** operates the lancing system and positioner air motors. It is simple to set up, operate and move about. An air filter and lubricator are included for air motor maintenance. 25 ft of 1/2" air hose is supplied for each air motor.

STEP 4

Control Box

Choose the remote operating controls for air powered positioning system.

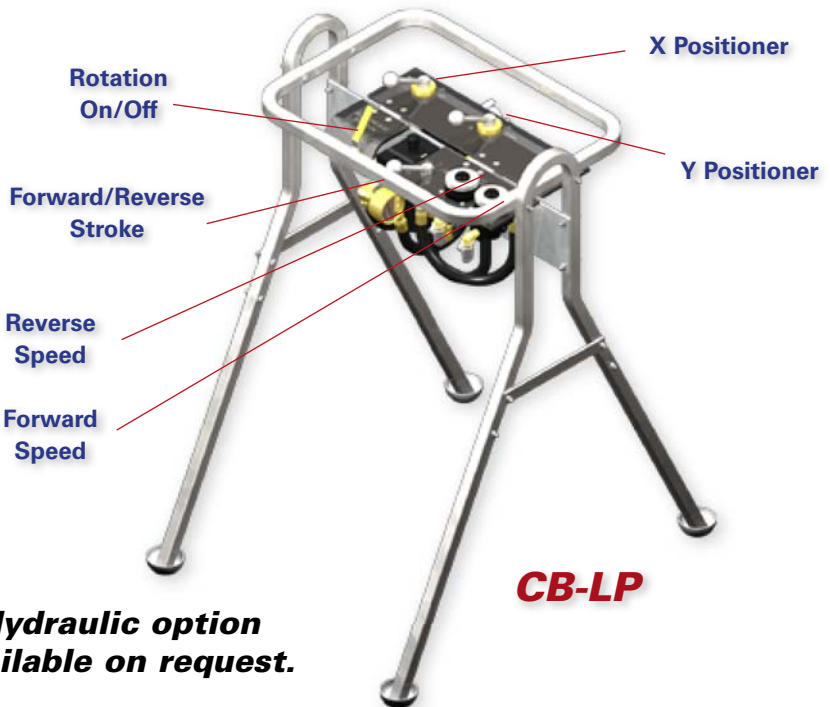

Hydraulic option available on request.

CB-LP Specs

MODEL	CB-LP
Rotation	On/Off
Stroke	Forward/Back
Stroke Speed	Regulated
Forward fps	Regulated
Back fps	Regulated
X Motion (L/R)	Left/Right
Y Motion (U/D)	Up/Down
Air Hoses Incl.	7
Ship Weight	60 lbs 27 kg

ToolTalk™ - Connecting Pneumatic Hoses



We have added color-coded tags to make connecting the pneumatic hoses an easier task. Simply match the color tags on the Control Box with the matching colored tag on the Lancing Positioner motor connections.