






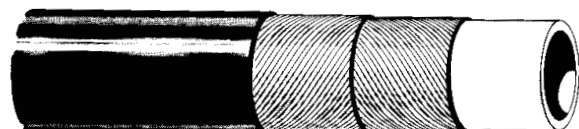


2004STR Flex Lances
APS #40-002 Parker Polyflex Hose - Red Jacket

Part Number	Min. I.D.	Max. O.D.	MAWP with 2.5:1 Safety Factor	MAWP with 4:1 Safety Factor	Min. Burst Pressure	Min. Bend Radius	Weight
#							
	In. / mm	In. / mm	PSI / Bar	PSI / Bar	PSI / Bar	In. / mm	Lbs./Ft. kg/m
2240D-025V34	0.17" 4 mm	0.30" 8 mm	17,400 1200	10,875 750	43,500 3000	2.95" 75 mm	0.067 0.10



Construction:

Polyoxymethylene core tube, high strength wire reinforced and a polyamide cover.

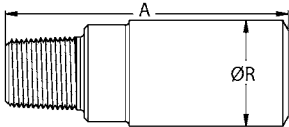
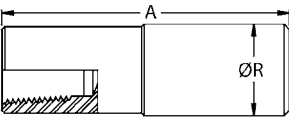
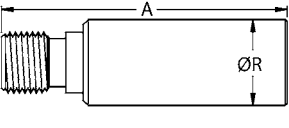
Applications:

Small diameter flexible hose, ideal for tight routing applications such as high pressure heat exchanger tube cleaning in petrochemical and power plants.

Temperature Range: -40° F and +140° F (-40° C and +60° C). Contact Polyflex for temperatures outside this range.

Fittings: See below. Parker ProLance®.

Example: 40-002-0104-025 is a 2004STR 1/16" NPT (M) x 1/8" NPT (M) x 25 feet long

End Fitting Code	Thread	Overall Length	Diam.	MAWP PSI/Bar	Illustration
NPT (M) ProLance* 01 04	1/16" NPT 1/8" NPT	A 1.20"/30 mm 1.10"/28 mm	R 0.44"/11 mm 0.44"/11 mm	15K/1034 15K/1034	
NPT (F) ProLance* 03	1/16" NPT	A 1.50" 38 mm	R 0.44" 11 mm	15K 1034	
UNF (M) ProLance* 34 32	5/16"-32 5/16"-24	A 1.10"/28 mm 1.31"/33	R 0.44"/11 mm 0.44"/11 mm	15K/1034 15K/1034	
UNF (F) ProLance* 31 35	5/16"-24 #12-28	A 1.50"/38 mm 1.28"/33 mm	R 0.44"/11 mm 0.44"/11 mm	15K/1034 15K/1034	