









2104ST Flex Lances
APS #40-033 Parker Polyflex Hose - Black Jacket

| Part Number | Min. I.D. | Max. O.D. | MAWP with 2.5:1 Safety Factor | MAWP with 4:1 Safety Factor | Min. Burst Pressure | Min. Bend Radius | Weight | |
|---------------------|---|---|---|---|--|---|---|------|
| # |  |  |  |  |  |  |  | |
| | In. / mm | In. / mm | PSI / Bar | PSI / Bar | PSI / Bar | In. / mm | Lbs./Ft. | kg/m |
| 2244N-025V00 | 0.17" 4 mm | 0.38" 10 mm | 17,400 1200 | 10,870 750 | 43,500 3000 | 2.17" 55 mm | 0.13 | 0.19 |

Construction: Polyamide core tube, high strength wire reinforced and a polyurethane outer cover.


Applications: Small diameter, low volumetric expansion hose. Ideal for pressure testing, portable hydraulic tools that require extreme kink resistance and maximum flexibility. Available in long single lengths and in Twin-Line construction.

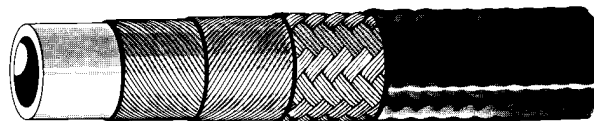

Temperature Range: -40° F and +140° F (-40° C and +60° C). Contact Polyflex for temperatures outside this range.

Fittings: See below.

Example: 40-033-0909-025 is a 2104ST 1/4" NPT (M) x 1/4" NPT (M) x 25 feet long

| End Fitting Code | Thread | Overall Length | Diam. R / Hex Size H | MAWP PSI/Bar | Illustration |
|------------------|----------|----------------|----------------------|--------------|---|
| NPT (M) | | A | H | |  |
| 53 | 1/8" NPT | 1.86"/47 mm | 0.47"/12 mm | 15K/1034 | |
| 09 | 1/4" NPT | 2.44"/62 mm | 1.10"/28 mm | 15K/1034 | |