






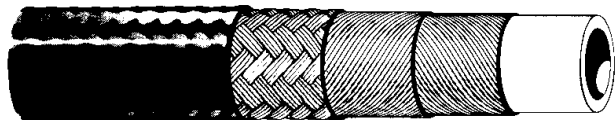


Blue Snake 3/8" NPT Flex Lances
APS #40-042 Parker Polyflex Hose - Blue Jacket

Part Number	Min. I.D.	Max. O.D.	MAWP with 2.5:1 Safety Factor	MAWP with 4:1 Safety Factor	Min. Burst Pressure	Min. Bend Radius	Weight	
#								
	In. / mm	In. / mm	PSI / Bar	PSI / Bar	PSI / Bar	In. / mm	Lbs./Ft.	kg/m
2X90N-06V14	0.40" 10 mm	0.85" 22 mm	23,200 1600	15,000 1034	58,000 4000	3.75" 95 mm	0.63	0.94



Construction:

Polyamide core tube, steel wire and fiber combination reinforcement with a polyurethane outer cover.

Applications:

Flexible, lightweight, chemical resistant alternative to rubber hose for waterblast cleaning applications in pulp and paper mills, steel mills, power plants and petrochemical plants. Available in long lengths.

Temperature Range:

-40° F and +140° F (-40° C and +60° C). Contact Polyflex for temperatures outside this range.

Fittings:

See below.

Example:

40-042-1010-025 is a Blue Snake 3/8" NPT (M) x 3/8" NPT (M) x 25 feet long

End Fitting Code	Thread	Overall Length	Diam. R / Hex Size H	MAWP PSI/Bar	Illustration
NPT (M) 10	3/8" NPT	A 3.30"/84 mm	H 0.75"/19 mm	15,000 1034	