









**Red Snake 1/4" NPT Flex Lances**  
**APS #40-041 Parker Polyflex Hose - Red Jacket**

Part Number	Min. I.D.	Max. O.D.	MAWP with 2.5:1 Safety Factor	MAWP with 4:1 Safety Factor	Min. Burst Pressure	Min. Bend Radius	Weight
#							
	In. / mm	In. / mm	PSI / Bar	PSI / Bar	PSI / Bar	In. / mm	Lbs./Ft. kg/m
<b>2X90N-04V14</b>	0.25" 6 mm	0.53" 13 mm	18,560 1280	11,600 800	46,400 3200	1.57" 40 mm	0.19 0.28

**Construction:** Polyamide core tube, steel wire and fiber combination reinforcement with a polyurethane outer cover.

**Applications:** Flexible, lightweight, chemical resistant alternative to rubber hose for waterblast cleaning applications in pulp and paper mills, steel mills, power plants and petrochemical plants. Available in long lengths.

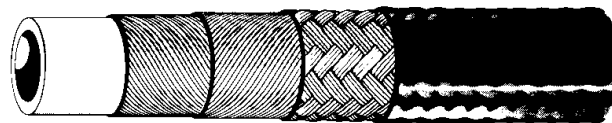

**Temperature Range:** -40° F and +140° F (-40° C and +60° C). Contact Polyflex for temperatures outside this range.

**Fittings:** See below.

**Example:** 40-041-0909-025 is a Red Snake 1/4" NPT (M) x 1/4" NPT (M) x 25 feet long

End Fitting Code	Thread	Overall Length	Diam. R / Hex Size H	MAWP PSI/Bar	Illustration
NPT (M) 09	1/4" NPT	<b>A</b> 2.62"/67 mm	<b>H</b> 0.63"/16 mm	15,000 1034	